


DESCRIPTION

The TS-700 is a center amplifier for the TS Series conference systems, and is designed to be used in combination with the conference units (TS-701 and TS-702). If the conference units need to be expanded, the center amplifier can be converted into an expansion amplifier with the switch located on the rear panel. The TS-700 is small in size, and can be easily installed and quickly put away after use.


SPECIFICATIONS

Power Requirements	220 V /230 VAC, 50/60 Hz (Selectable)
Power Consumption	Max. 135 W
Input	Microphone : 600 Ω , -60 dBV, unbalanced, phone jack
	AUX 1 : 10 k Ω , -20 dBV, unbalanced, phone jack
	AUX 2 : 600 Ω , 0 dBV, unbalanced, phone jack
	Lines 1 & 2: 0 dBV, unbalanced, 8P mini socket
Output	Recording : 10 k Ω , -20 dBV, unbalanced, phone jack RCA jack ... 2
	Lines 1 & 2: 0 dBV, unbalanced, 8P mini socket
	Power Requirements: 35 VDC 1 A/line, 2 lines, 2 A in total
Control	Priority Speech chime: Operation of TS-701's priority button activates a single-tone chime.
	Speaker Restriction: Number of simultaneously-usable TS-702s can be set to 1, 2, 4, or 6
	Automatic Mic-off: Function OFF/20 s/40 s (selectable)
Number of Connectable Conference Units	70 Max. 35 units per line, max. 140 units when 2 expansion amplifiers connected
Operating Temperature Range	0 °C - +40 °C
Finish	Colored steel plate, semi-mat black
Dimensions	210 (W) \times 93 (H) \times 316 (D) mm
Weight	3.9 kg
Accessory	Power cord ... 1
Optional Components	Extension cord YR-700


APPEARANCE

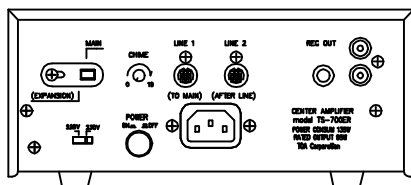

Rear View

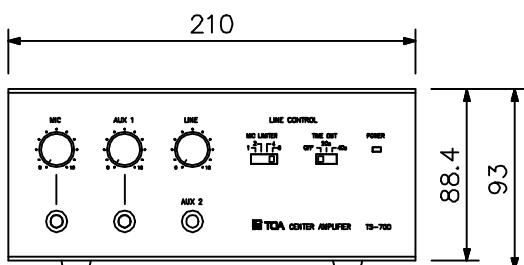

Front View

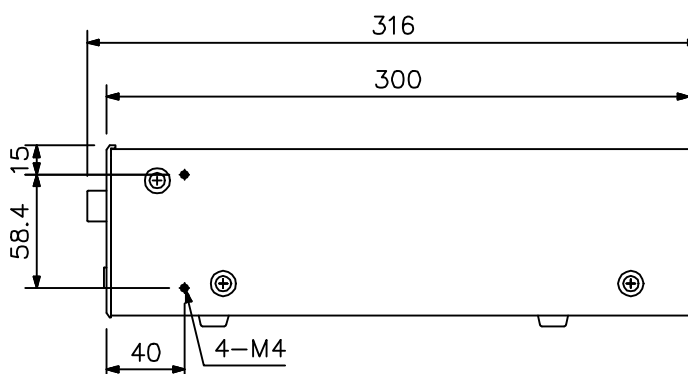

Side View

UNIT: mm SCALE: 1/4