

# DCS 6000 Digital Conference System Conference Units

## CM 6660F

## DM 6660F



### Chairman and Delegate Micro- phone units with

- **Fixed gooseneck microphone**
- **5 button voting**
- **Chipcard**
- **Channel Selector**



The CM/DM 6660F are fully digital microcomputer controlled conference units with loudspeaker and illuminated microphone mounted on a semi gooseneck arm. The units support 5 buttons voting facility and a chip card reader for identifying the user for the system.

The units are designed for flush mounting in tables.

The loudspeaker is automatically switched off when the microphone is activated.

The CM/DM 6660F units offer full compatibility with the DCS 6000 Digital Conference System with the CU 6010, Central Unit & EX 6010, Extension Unit.

#### The CM/DM 6660F features:

- Illuminated red ring on microphone head for easy identification of speaker. Clearly visible even in broadcast lighting
- Double rubber-suspended, low noise electret microphone
- High quality speaker
- One built-in channel selector with 32 languages/channels

- Volume control and one LCD for displaying of language/channel numbers or volume
- 5 buttons for voting
- Chip card reader for user identification
- Digital Audio Transmission
- Single cable "Loop Through"
- Free cable topology w. repeater
- 2 pieces DCS-LAN - Standard CAT5 connections for STP/FTP cable
- Unique ID no. identification during system initialization
- On/Off push button to activate/deactivate the microphone
- "Request" LED indicator for microphone in request queue.
- "Speak" LED indicator for microphone On

#### Additional for CM 6660F:

- Microphone On/Off push button with chairman priority (chairman overrides delegates)
- "Delegate Off" push button for switching off all active delegate microphones
- "Delegate Off" LED indicator for all active delegate microphones off

## How to order

#### Conference units:

CM 6660F  
DM 6660F

#### Order no.:

#### Connection Cable for DCS 6000 components (0,5 m - 50 m):

EC 6000-0,5	EC 6000-10
EC 6000-01	EC 6000-20
EC 6000-05	EC 6000 -50



# DCS 6000 Digital Conference System Conference Units

## CM 6660F

## DM 6660F



### Specifications

#### Microphone:

Type: Electret Cardioid  
Frequency Range: 100 Hz - 15 kHz  
Sensitivity: -22 dBv/Pa  
Max. SPL: 125 dB (3% THD)  
Equivalent Noise: App. 20 dB SPL  
Front/Back Ratio: >20 dB (1 kHz)

#### Dimensions:

(W x H x D) 235 x 90 x 53 mm  
w/o mic. arm  
Length mic. arm: 40 cm  
Total weight: 0,9 kg

#### Power Consumption:

3,8 W typical

#### Loudspeaker:

Weight: 134 g  
Frequency Range: 150 Hz - 15 kHz  
Power maximum: 3 W RMS

#### Colour:

Black anodised aluminium front plate

#### Channel Selector:


Headphone connection:  
1 x 3,5 mm jack female mono/stereo  
socket for analogue output of all 32  
languages/channels

Frequency response: 100-14 kHz

Displays: 1 x back lit LCD,  
3 characters

### Cut-out Drawing

DIMENSIONS AND "CUT-OUT"

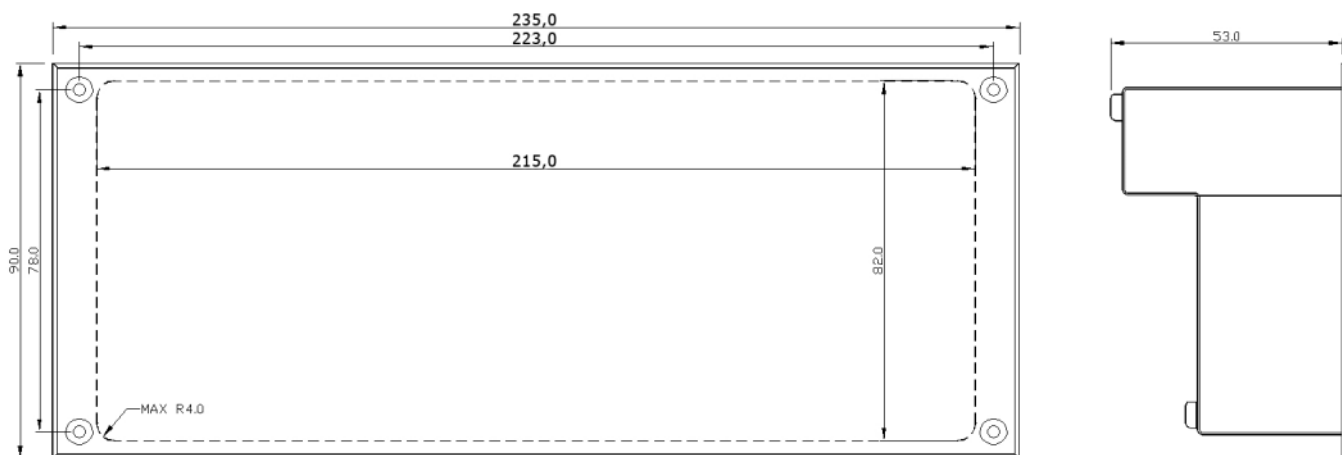

Please refer to Data Sheet for CU 6010 for further specifications of the DCS 6000 system.

The DCS 6000 system conforms to all relevant standards - e.g. IEC 914, ISO 4043, ISO 2603

Data subject to change without notice in interest of product improvements.