

HD Conference Dome

www.boschsecurity.com



BOSCH

Invented for life



- ▶ HD 1080p and 720p resolutions
- ▶ 160x zoom (10x optical, 16x digital)
- ▶ Industry standard HD-SDI output
- ▶ Control and configuration via Ethernet
- ▶ Screen line option for displaying delegate names up to 16 characters

The HD Conference Dome is an extremely compact and easy to install PTZ camera with an industry standard HD-SDI output for superb HD quality video.

The camera provides complete network-based control of all dome functionality including pan/tilt/zoom operation, presets as well as web-based configuration of all dome settings.



Notice

Use of Camera

The HD Conference Dome is designed for use in conferencing applications only.

HD Conference Dome highlights

With a dome diameter of only 5.04 inches (12.8 cm), the HD Conference Dome is nearly 50% smaller than the Bosch AutoDome. These compact dimensions make the HD Conference Dome ideal for conference environments.

Despite its compact design, the HD Conference Dome delivers state-of-the-art technology and features that are rare to most compact PTZ cameras. Its variable

pan and tilt speeds and AutoPivot ensure optimal camera control and viewing at all zoom levels. The high-performance 160x (10x optical/16x digital) zoom autofocus camera incorporates the latest digital imaging technology with excellent sensitivity and resolution. With 64 user-defined presets the HD Conference Dome is not small on features.

The HD Conference Dome maximizes your conference investment by integrating with Bosch conference systems including the DCN Next Generation conference system, as well as the DCN Wireless discussion system.

The HD Conference Dome is simple to install and use; available with surface, wall, recessed, and pipe mount options.

System overview

High-performance 160x PTZ day/night camera

The HD Conference Dome PTZ camera has a 1/2.5-inch progressive scan CMOS sensor. With up to 1080p resolution and sensitivity to below 1.0 lux, the HD Conference Dome offers exceptional performance at a very affordable price.

Pan and tilt preset repeatability are accurate to within ± 0.1 degrees to ensure that the correct scene is captured every time. The HD Conference Dome delivers variable pan/tilt speeds from a crawl speed of only 1 degree per second up to an ultra-quick 120 degrees per second. The dome is capable of pan speeds of 360 degrees per second and tilt speeds of 100 degrees per second between prepositions. The HD Conference Dome provides a tilt range of 0 to 94 degrees, and a pan range of up to 360 degrees continuous rotation.

The AutoScaling (proportional zoom) and AutoPivot (automatically rotates and flips the camera) features ensure optimal control.

Industry standard HD-SDI output

The HD Conference Dome makes use of an industry standard HD-SDI output for superb HD quality video. The HD Conference Dome supports 1080p30 and 720p60 resolutions for 50 Hz and 60 Hz models at 16:9 aspect ratio.

Multiple video streams

Next to the HD-SDI output, Bosch's innovative Quad-streaming feature enables the HD Conference Dome to deliver three H.264 streams together with an M-JPEG stream in full and reduced bandwidth modes for monitoring purposes.

Image stabilization

Image stabilization algorithms included with the HD Conference Dome reduces camera shake in both the vertical and horizontal axis, resulting in exceptional image clarity. Bosch's unique image stabilization solution does not reduce camera sensitivity, unlike competitive systems.

Unsurpassed reliability

As with all Bosch products, the camera is designed using the industry's best design process and is subjected to the most stringent testing standards such as HALT (highly accelerated life testing).

Functions

The following are some of the features that make the HD Conference Dome the perfect fit for a variety of conference applications.

Network-based control and configuration

The HD Conference Dome enables full camera control and configuration capabilities over the network. Operators or technicians can control camera pan/tilt/zoom operation, and presets virtually anywhere without need for additional wiring.

The embedded web server lets the installer access all the user settings, make camera adjustments, and update firmware via a standard web browser or via the Bosch Video Management System.

Device management

Simple Network Management Protocol (SNMP) support facilitates the remote monitoring and management. The HD Conference Dome provides full support for SNMP v3.

Ease of installation and servicing

The HD Conference Dome has been designed for quick and easy installation. The dome comes fully assembled and ready for surface mount applications. Also available are wall, recessed, and pipe mounting kits which allow the HD Conference Dome to be easily adapted for the individual site requirements.


Power over Ethernet

Power for indoor camera models may be supplied via a Power over Ethernet Plus (PoE+, IEEE 802.3at, class 4) compliant network cable connection. With this configuration, only a single cable connection is required to power and to control the camera while also monitoring images from the camera via the web server. An additional coax cable is required for the video from the HD-SDI output.


Certifications and approvals

| | |
|-------------------------------------|--------------------------------------------------------------|
| Electromagnetic Compatibility (EMC) | Complies with FCC Part 15, ICES-003, and CE regulations |
| Product Safety | Complies with CE regulations, UL, CSA, EN, and IEC Standards |


Installation/configuration notes

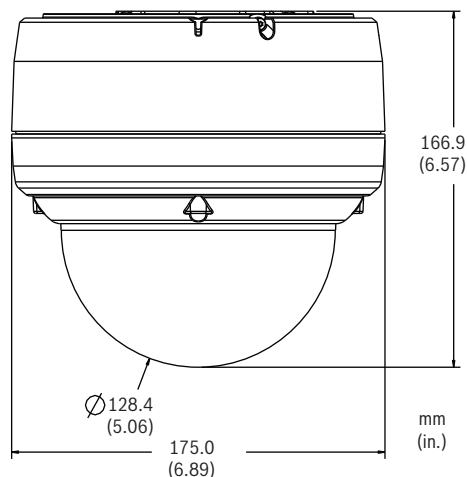




HD Conference Dome Dimensions

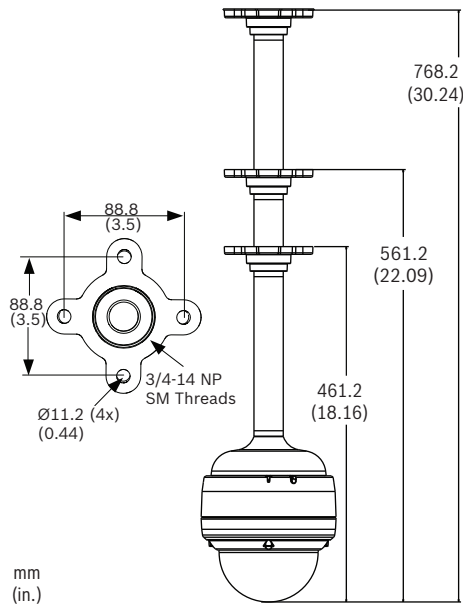


Pipe Mount Dimensions

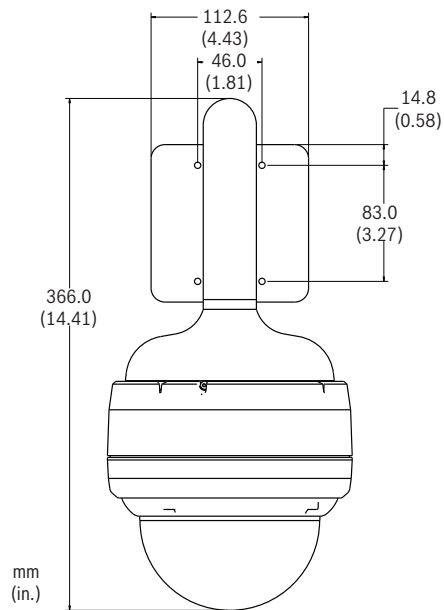

Wall Mount Dimensions

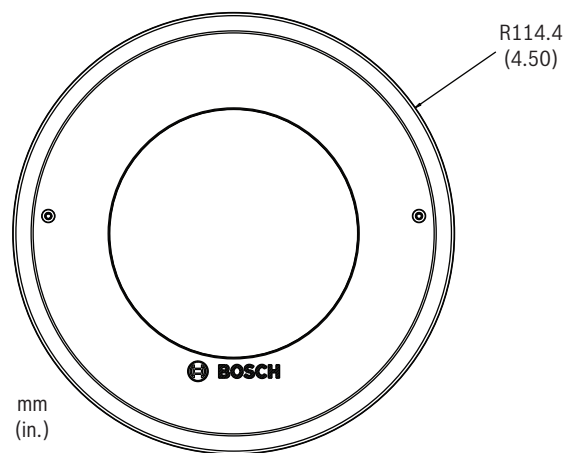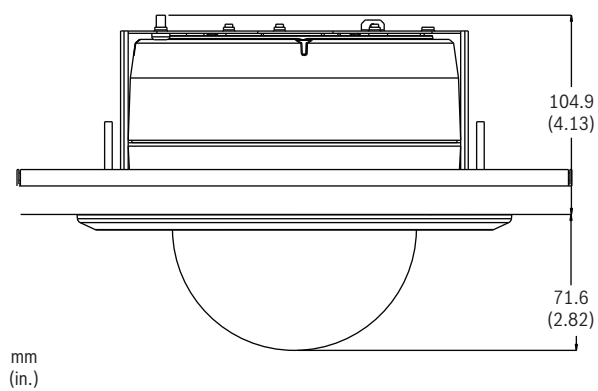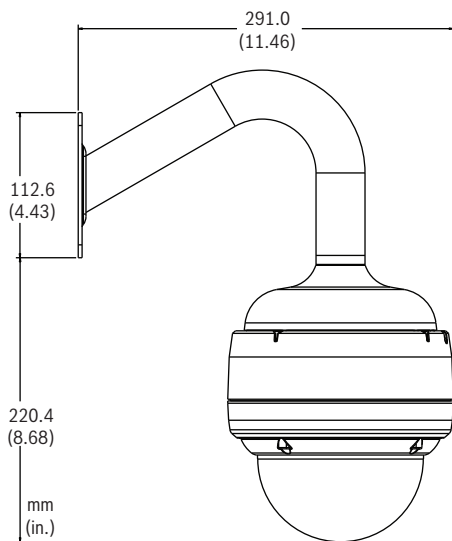

In-Ceiling / Recessed Mount Dimensions

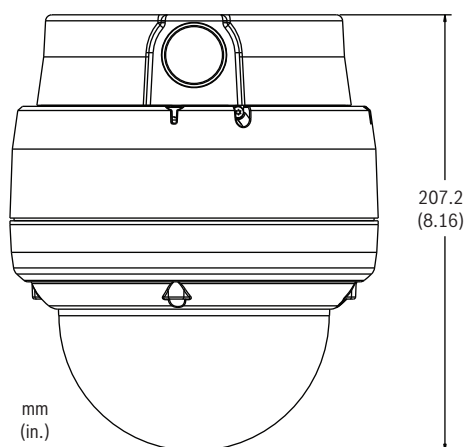

Surface Mount Dimensions

Parts included

Technical specifications

10x HD Camera

| | | |
|-----------------------------------|------------------------------------------------------|---------------------------|
| Imager | 1/2.5 inch progressive scan CMOS | |
| Number of Pixels | 2.1 Megapixels | |
| Aspect Ratio | 16:9 | |
| Lens | 10x optical zoom (6.3 to 63 mm) (F1.8/F2.5 to close) | |
| Focus | Automatic with manual override | |
| Iris | Automatic with manual override | |
| Field of View | Horizontal: 5.5° to 50.6° Vertical: 3.1° to 29.3° | |
| Automatic Gain Control | Normal, Medium, High, Fixed | |
| Synchronization | Internal | |
| Aperture Correction | On/Off | |
| Digital Zoom | 16x | |
| Sensitivity(typical) ¹ | 30 IRE² | 50 IRE² |

Day Mode

| | | |
|-----------------|----------|----------|
| SensUP Off | 1.2 lx | 2.0 lx |
| SensUP On (64x) | 0.038 lx | 0.063 lx |

Night Mode

| | | |
|--------------------------------|------------------------------------------------------|-----------|
| SensUP Off | 0.06 lx | 0.1 lx |
| SensUP On (64x) | 0.0018 lx | 0.0031 lx |
| Electronic Shutter Speed (AES) | 1x to 64x; 1/50 (1/60) to 1/10000 | |
| Signal to Noise Ratio | > 50 dB (AGC off) | |
| Backlight Compensation | On/Off | |
| White Balance | ATW, Indoor, Outdoor, AWB Hold, Extended ATW, Manual | |

| | |
|--------------------------------------------------------------------------------------|---------------------------------------------|
| | (adjustable R and B signals in Manual mode) |
| Day/Night | Monochrome, Color, Auto |
| 1. F1.8, 1/30 (1/25) shutter, maximum AGC. 2. Tinted bubble adds 0.8 f-stop loss. | |

Software Control

| | |
|----------------------|---------------------------------------------------------------------------------------|
| Camera Configuration | Via Internet Explorer Web browser version 7.0 or later or Bosch Configuration Manager |
| Software Update | Firmware upload |

Video

| | |
|-----------|------------|
| HD-SDI | |
| Standards | SMPTE 292M |

Resolutions (H x V) and Frame Rates

| | |
|-----------------|---------------------|
| • Full HD/1080p | 1920 x 1080, 30 ips |
| • HD/720p | 1280 x 720, 60 ips |
| Data Rate | 1.5 Gbit/s |
| Video Delay | 10 ms |

Network Stream

| | |
|------------------|-----------------------------------------------------------------------------------------------|
| Standards | H.264 (ISO/IEC 14496-10), M-JPEG, JPEG |
| Streaming | Individually configurable streams in H.264 and M-JPEG, configurable frame rate and bandwidth; |
| • 1080p30 | One (1) H.264 1080p30 stream plus one (1) M-JPEG and one (1) I-frame stream |
| • 720p60 | One (1) H.264 720p60 stream plus one (1) M-JPEG and one (1) I-frame stream |
| GOP Structure | IP, IBP, IBBP |
| Data Rate | 9.6 kbps to 6 Mbps |
| Overall IP Delay | 240 ms |

Resolutions (H x V) and Frame Rates

Stream 1

| | |
|-----------------|---------------------|
| • Full HD/1080p | 1920 x 1080, 30 ips |
| • HD/720p | 1280 x 720, 60 ips |

Stream 2³

| | |
|--------------------------------|-------------------|
| • SD/480p (WVGA) ⁴ | 854 x 480, 30 ips |
| • SD/240p (WQVGA) ⁴ | 432 x 240, 30 ips |

3. Stream 1 must be set to 720p at 30 ips.
 4. Images displayed in 16:9 aspect ratio.

Network

| | |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Protocols | RTP, Telnet, UDP, TCP, IP, HTTP, HTTPS, FTP, DHCP, IGMP V2/V3, ICMP, ARP, SMTP, SNTP, SNMP, RTSP, 802.1x, iSCSI, DynDNS, UPnP |
| NTCIP Protocols | |
| • CCTV Camera Control | NTCIP 1205 |
| • Application Layer | SNMP per NTCIP 1101:1996 & NTCIP 2301 |
| • Transport/Network Layers | TCP/IP per NTCIP 2202:2001 |
| • Sub-network Layer | PMPP (Point to Multi-Point Protocol) per NTCIP 2101:2001 & NTCIP 2102:2003 |
| Ethernet | 10-Base T/100 Base-TX, auto-sensing, half/full duplex, RJ45 |
| PoE+ | IEEE 802.3at, class 4 |

Mechanical/Electrical

| | |
|--------------------|--------------------------------------------------------|
| Pan Range | 0–360° continuous |
| Tilt Angle | 0–93.6° |
| Variable Speed | Pan: 1°/s to 120°/s Tilt: 1°/s to 100°/s |
| Pre-position Speed | Pan: 360°/s Tilt: 100°/s |
| Preset Accuracy | ± 0.1° typical |
| Rated Voltage | 24 VAC ± 10%, 50/60 Hz or PoE+ (IEEE 802.3at, class 4) |
| Power Draw | 17 W typical |

Environmental

| | |
|-----------------------|------------------------------------|
| Operating Temperature | –10°C to 30°C (14°F to 86°F) |
| Storage Temperature | –20°C to 60°C (–4°F to 140°F) |
| Operating Humidity | 0% to 90% relative, non-condensing |

Miscellaneous

| | |
|---------------------|------------------------------------------------------------------------------------------------------|
| Pre-positions | 64 |
| Screen Line | Up to 16 characters (only standard ASCII character set can be used) |
| Supported Languages | English, German, Dutch, French, Italian, Spanish, Portuguese, Polish, Russian, Chinese, and Japanese |

User Connections

| | |
|-----------------------|-------------------------------------------------------|
| Power | |
| • PoE+, Indoor Models | RJ-45 100 Base-TX Ethernet PoE+ IEEE 802.3at, class 4 |
| • Camera, All Models | 24 VAC, 50/60 Hz |
| Video | BNC with HD-SDI output |
| Control | RJ-45 100 Base-TX Ethernet |

Construction

| | |
|--------------------------|------------------------------------|
| Size (Diameter x Height) | 153.0 x 133.0 mm (6.02 x 4.61 in.) |
| Bubble Size | 128.0 mm (5.04 in.) |
| Weight | 1.92 kg (4.24 lb) |
| Material | |
| • Housing | Cast aluminum |
| • Bubble | Acrylic |
| Color | White or Charcoal |

Ordering information

VCD-811-IWT HD Conference Dome, White, with Tinted Bubble

White, 1080p HD indoor camera for use with video conference system, with tinted bubble
 Order number **VCD-811-IWT**

VCD-811-ICT HD Conference Dome, Charcoal, with Tinted Bubble

Charcoal, 1080p HD indoor camera for use with video conference system, with tinted bubble
 Order number **VCD-811-ICT**

Accessories

VJR-A3-IC AutoDome Junior HD Indoor Recessed Mount

Recessed mount for indoor camera applications that do not require IP54 or a plenum rating
 Order number **VJR-A3-IC**

VJR-A3-IC54 AutoDome Junior HD Plenum-rated and Outdoor Recessed Mount

Recessed mount required for indoor camera applications that must attain an IP54 or a plenum rating, and required for all recessed outdoor camera applications

Order number **VJR-A3-IC54**

VJR-SBUB2-CL AutoDome Junior HD Clear Bubble, Indoor

Order number **VJR-SBUB2-CL**

VJR-SBUB2-TI AutoDome Junior HD Tinted Bubble, Indoor

Order number **VJR-SBUB2-TI**

UPA-2450-60 Power Supply, 120 V, 60 Hz

Indoor power supply for camera. 120 VAC, 60 Hz In; 24 VAC, 50 VA Out

Order number **UPA-2450-60**

UPA-2450-50 Power Supply, 220 V, 50 Hz

Indoor power supply for camera. 220 VAC, 50 Hz In; 24 VAC, 50 VA Out

Order number **UPA-2450-50**

Represented by:**Americas:**

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com